


MAX620H250STR-HDSTR

 687 x 528 x H286 mm
27.05 x 20.79 x H11.26 inch.


 620 x 460 x 250 mm
24.40 x 18.11 x 9.84 inch.

 60 + 190 mm
2.36 + 7.48 inch.

 VERSION S: 9,7 kg / 21.38 lb
VERSION HDS: 12,82 kg / 28.26 lb

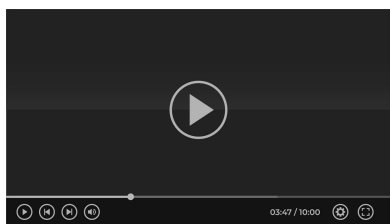

HIGH DENSITY
CUBED FOAM
VIDEO



SIDE HANDLES
MANIGLIA LATERALE
SU ENTRAMBI I LATI



EXTENDABLE HANDLE
RETRO MANIGLIA
TELESCOPICA A
SCOMPARSA



- **WATERTIGHT SEAL AROUND LID** / GUARNIZIONE ERMETICA
- **AUTOMATIC PRESSURE RELEASE VALVE** / VALVOLA AUTOMATICA DI PRESSURIZZAZIONE
- **EASY TO OPEN DOUBLE THROW LATCHES** / CHIUSURE DI SICUREZZA A DOPPIO STEP
- **LOAD TESTED SOFT GRIP HANDLE** / MANICO MORBIDO AD ALTA ERGONOMICITÀ
- **STACKABLE INTERLOCKING SYSTEM** / SISTEMA DI IMPILABILITÀ
- **THICK BODY MATERIAL** / PARETI SPESSIE ANTIURTO
- **FULLY LENGTH HINGES** / CERNIERA LUNGO TUTTO IL PROFILO DELLA VALIGIA
- **NYLON PINS, CORROSION FREE** / PERNI IN NYLON ANTI CORROSIONE
- **SCREEN PRINTING AND RESIN LABEL SPACE** / SERIGRAFIA ED ETICHETTA RESINATA
- **MATERIAL: POLYPROPYLENE COPOLYMER** / MATERIALE: POLIPROPILENE COPOLIMERO
- **LATCHES: NYLON** / SERRATURE IN NYLON
- **O-RING: POLYMER** / GUARNIZIONE POLIMERO
- **TROLLEY: METAL + PLASTIC** / TROLLEY: METALLO + PLASTICA
- **WHEELS WITH STAINLESS STEEL PIN** / RUOTE CON ASSALE IN ACCIAIO INOX

- **INTERNAL CUBIC VOLUME: 69750000 CUBIC MM - 2.463 CUBIC FEET** / VOLUME: 69750000 MM CUBI
- **VOLUME CAPACITY: 69.75 LT** / CAPACITÀ: 69.75 LT
- **PCS PER CARTON: 1** / PEZZI PER CARTONE: 1
- **WEIGHT OF THE FULL CARTON: 11.10 KG - 24.47 LBS.** / PESO DEL CARTONE: 11.10 KG
- **MOULDING: INJECTION MOLDED** / STAMPAGGIO: AD INIEZIONE
- **RANGE TEMPERATURE: -30 / 90°C (-22 / 194°F)** / RANGE DI TEMPERATURA: -30 / 90°C (-22 / 194°F)
- **ACCESSORIES: CUBED & CONVOLUTED FOAMS** / SPUGNE CUBETTATE & SPUGNE BUGNATE

IP67 RATING

ATA 300

MIL SPECS


DEF STAN 81-41
STANAG 4280



+



+



=



Base foam

1 x 40 mm / 1 x 1.57 inch

Cubed foam

3 x 50 mm / 3 x 1.97 inch

Convuluted foam

1 x 50 mm / 1 x 1.97 inch


MAX620H250STR



+



+



=



Base foam

1 x 40 mm / 1 x 1.57 inch

High Density Cubed foam

3 x 50 mm / 3 x 1.97 inch

Convuluted foam

1 x 50 mm / 1 x 1.97 inch

MAX620H250HDSTR